



## Dane techniczne

Typ	prędkość obrotowa [obr./min]	pobór mocy max. [W]	napięcie		wydajność max. [m³/h]	poziom ciśnienia akustycznego			regulator tyrystorowy	regulator tranzystorowy	masa [kg]	nr artykułu
			230V [A]	400V [A]		wł. [dB(A)]	wył. [dB(A)]	emitowane [dB(A)]				
Jednofazowe												
CVAB/4-700/200	1375	62	0,3	-	690	44	46	32	REB-1	RMB-1,5	26	41020310
CVAB/4-1200/250	1340	115	0,57	-	1150	47	51	35	REB-1	RMB-1,5	30	41020320
CVAB/4-1500/250	1380	160	0,72	-	1520	52	54	42	REB-1	RMB-1,5	38	41020330
CVAB/4-2600/355	1350	275	1,2	-	2600	55	60	42	REB-2,5	RMB-1,5	46	41020340
CVAB/4-3800/355	1380	570	2,6	-	3750	60	63	48	REB-5	RMB-3,5	62	41020350
CVAB/4-5600/400	1380	1100	4,8	-	5600	66	70	52		RMB-8	94	41020360
Trójfazowe												
CVAT/4-700/200	1375	62	-	0,17	690	44	46	32		RMT-1,5	26	41020510
CVAT/4-1200/250	1340	115	-	0,35	1150	47	51	35		RMT-1,5	30	41020520
CVAT/4-1500/250	1380	160	-	0,5	1520	52	54	42		RMT-1,5	38	41020530
CVAT/4-2600/355	1350	275	-	0,8	2600	55	60	42		RMT-1,5	46	41020540
CVAT/4-3800/355	1380	570	-	1,5	3750	60	63	48		RMT-3,5	62	41020550
CVAT/4-5600/400	1380	1100	-	1,8	5600	66	70	52		RMT-2,5	94	41020560
CVAT/4-9000/500	1475	2050	-	4,8	8800	75	76	60			105	41020570
CVAT/6-8000/500	960	900	-	3,3	5700	65	67	53			105	41020580
CVAT/6-10000/630	975	1500	-	3,9	10000	69	69	53			120	41020590
CVAT/6-14000/630	965	2500	-	5,4	14000	73	74	58			180	41020600
CVAT/6-17000/710	965	3900	-	6,9	17100	76	78	60			220	41020610

## Wymiary [mm]

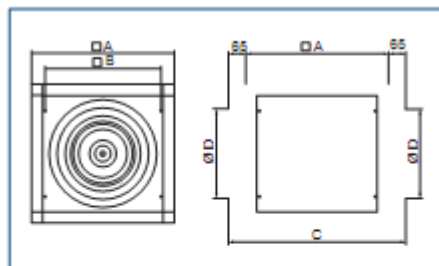

Typ	A	B	C	ØD
CVAB /4-700/200	400	192	530	200
CVAB /4-1200/250	450	242	580	250
CVAB /4-1500/250	500	292	630	250
CVAB /4-2600/355	550	342	680	355
CVAB /4-3800/355	650	442	780	355
CVAB /4-5600/400	800	591	930	400

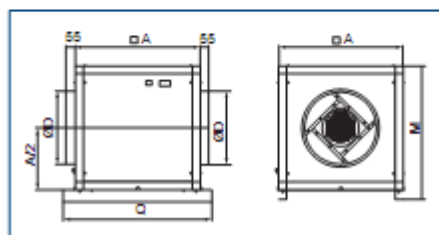

Typ	A	ØD	Q	M
CVAT/4-9000/500	860	500	1020	940
CVAT/6-8000/500	860	500	1020	940
CVAT/6-10000/630	920	630	1080	1000
CVAT/6-14000/630	980	630	1140	1060
CVAT/6-17000/710	1037	710	1197	1117