


Dane techniczne


Typ	moc silnika		prędkość obrotowa		wydajność		masa
	min. [kW]	max. [kW]	min. [obr./min]	max. [obr./min]	min. [m³/h]	max. [m³/h]	
CVHT-9/9	0,25	1,1	800	1700	700	4400	60
CVHT-10/10	0,25	2,2	700	1700	1100	6300	70
CVHT-12/12	0,37	3,0	600	1500	1300	9300	85
CVHT-15/15	0,75	4,0	600	1200	3000	12000	121
CVHT-18/18	0,75	7,5	400	950	2500	21200	160
CVHT-20/20	2,20	7,5	500	1000	4500	24400	250
CVHT-22/22	2,20	15,0	400	850	5000	36000	320
CVHT-25/25	2,20	15,0	350	750	5000	42000	330
CVHT-30/28	2,20	18,5	300	600	12000	57000	648

Wymiary [mm]

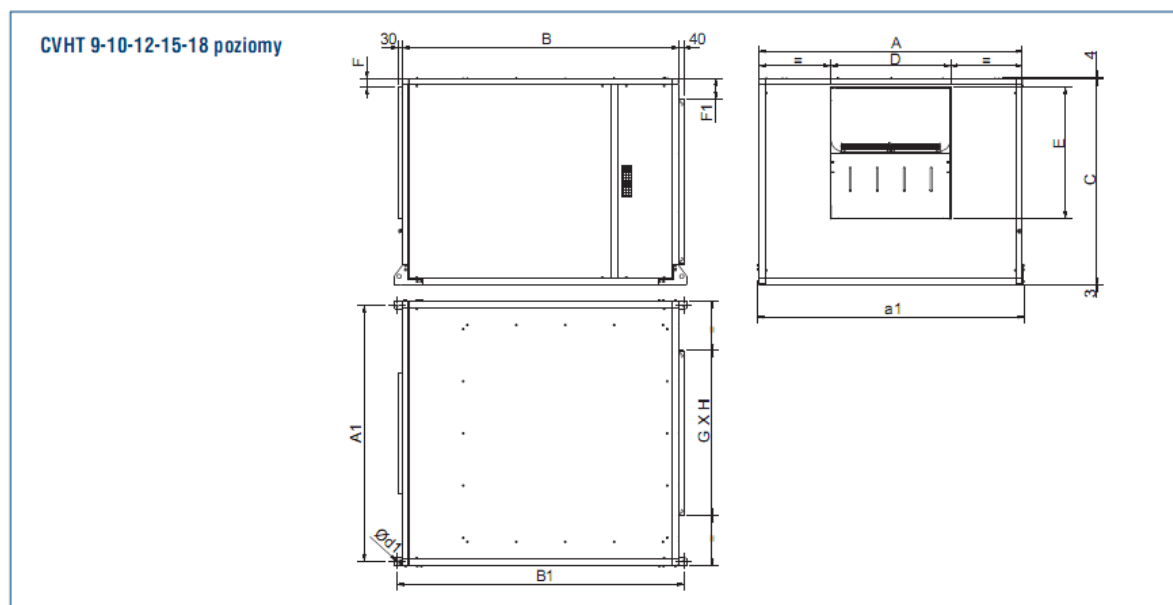

Typ	A	A1	a1	B	B1	C	D	Ød1	E	F	F1	GxH
CVHT-9/9-H	759	701	782	783	862,5	592	304	15	264	65,5	96	400x400
CVHT-10/10-H	821	763	844	837	916,5	618	337	15	293,5	65,5	84	450x450
CVHT-12/12-H	945	887	968	959	1038,5	680,5	400	15	345	65,5	90,25	500x500
CVHT-15/15-H	1104	1046	1127	1092	1171,5	776	476	15	407	65,5	88	600x600
CVHT-18/18-H	1250	1192	1273	1278	1357,5	882	560	15	485	65,5	91	700x700

CVHT 9-10-12-15-18 pionowy

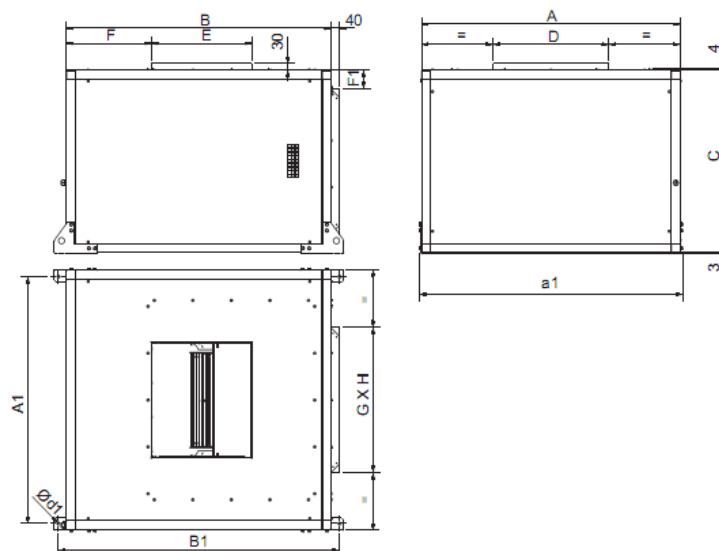

Typ	A	A1	a1	B	B1	C	D	Ød1	E	F	F1	GxH
CVHT-9/9-V	759	701	782	783	862,5	592	304	15	264	316,5	96	400x400
CVHT-10/10-V	821	763	844	837	916,5	618	337	15	293,5	316,5	84	450x450
CVHT-12/12-V	945	887	968	959	1038,5	680,5	400	15	345	343,5	90,25	500x500
CVHT-15/15-V	1104	1046	1127	1092	1171,5	776	476	15	407	368,5	88	600x600
CVHT-18/18-V	1250	1192	1273	1278	1357,5	882	560	15	485	408,5	91	700x700