


Dane techniczne

Typ	prędkość obrotowa [obr./min]	pobór mocy max. [W]	natężenie [A]	napiecie [V]	wydajność max. [m³/h]	temperatura otoczenia max. [°C]	poziom ciśnienia akustycznego* [dB(A)]	regulator	masa [kg]	nr artykułu
VENT 100 LK	2500	78	0,33	230	290	60	47	REB-1	3	40020880
VENT 125 LK	2450	80	0,35	230	410	60	47	REB-1	3	40020882
VENT 150 LK	2700	120	0,53	230	700	60	50	REB-1	5	40020884
VENT 160 LK	2750	130	0,55	230	760	60	51	REB-1	5	40020886
VENT 200 LK	2600	170	0,72	230	1000	60	52	REB-1	5	40020888
VENT 250 LK	2750	180	0,80	230	1100	60	54	REB-1	6	40020890
VENT 315 LK	1350	280	1,20	230	2650	70	60	REB-2,5	17	40020892


*- w odległości 3m, wentylator umieszczony w kanale

Wymiary [mm]

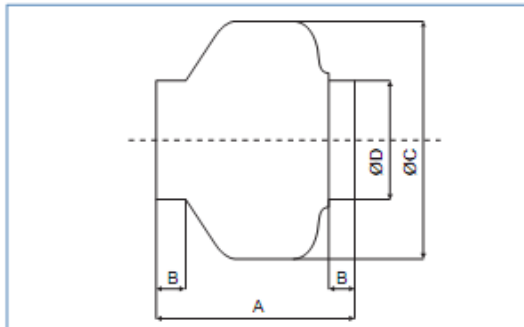

Typ	A	B	ØC	ØD
VENT-100 LK	194	23	243	98
VENT-125 LK	195	27	243	123
VENT-150 LK	214	24	333	147
VENT-160 LK	222	28	333	157
VENT-200 LK	223	25	333	198
VENT-250 LK	206	27	333	248
VENT-315 LK	230	25	401	312

Wysokość puszkii przyłączeniowej - 35mm

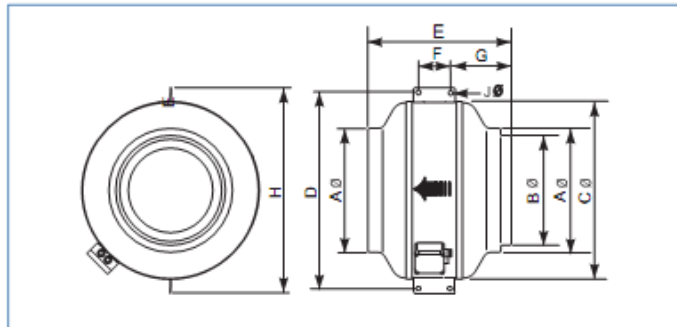

Wspornik dla wentylatorów typu VENT

